

The FEIN offset screwdriver makes life easier. Because the job's tough enough.

At the end of the day the job should be finished – not the person doing it. Presenting the FEIN offset screwdriver MAMMUT – for tricky jobs in difficult-to-access areas. With extremely high torque for soft screwdriving operations. The FEIN offset screwdriver is extremely robust and was specially designed for the professional processing of large wood screws, dowel screws and threaded bars, threaded inserts and door/window frame dowels. The 1/2" square tool holder and integrated forward/reverse rotation make this a versatile tool suitable for many different applications. The FEIN offset screwdriver becomes a regular drill with the tool-free addition of a removable drill

chuck. The FEIN offset screwdriver makes tough jobs easier. It's flexible, reliable and safe.





Offset screwdriver up to 16 mm

SCW 16-6

Powerful offset screwdriver for wood assembly jobs.

Fastening

Technical data		
Model	SCW 16-6	
Input	W	740
Output	W	450
Speed, full load	R.P.M	400
max. torque for soft screwdriving operation, approx.	Nm	70
Cable with plug	m	4
Weight	kg	3,7
Screw Ø	mm	8-16
Chuck		1/2"
Order Reference	7 210 98	

Included in price


1 metal tool case, 1 additional handle, 1 wrench socket insert each of SW 13, 17, 19, with 1 spacer 1/2" and bit each on 1/4" and 5/16" hexagonal socket

FEIN BENEFITS

- ▶ Extremely high torque for soft screwdriving operations in wooden beams and prefabricated house construction.
- ▶ Small dimensions make easy work of fitting screws in difficult-to-reach areas.
- ▶ Extremely robust for heavy duty applications.

- ▶ Able to handle extreme loads.
- ▶ Reversible.
- ▶ 1/2" square tool holder allows for great versatility.
- ▶ Drill chuck can be fitted and removed without the aid of tools. This allows it to be used fully as a rotary drill (accessories available).
- ▶ Available in 230V only.

For accessories, see page 110

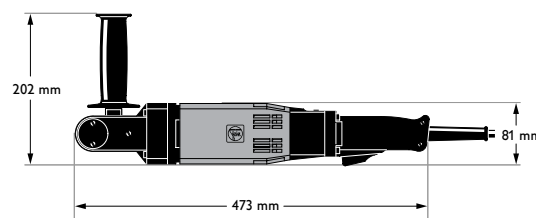

General accessories

tool case

metal 700 x 180 x 100 mm



Order Reference 3 39 01 021 01 1

Intermediate piece

with 1/2" square socket, output 5/16" hexagon socket



Order Reference 6 22 10 007 00 4

with 1/2" square socket, drive 1/4" hexagonal socket



Order Reference 6 22 10 010 00 8

Bits 5/16" hexagon head

for cross-slotted screws as per DIN 7962
Form Phillips extra hard

Gr.	L	Order Reference
	mm	
2	32	6 27 13 109 00 4

Form Z/Pozidriv

Gr.	L	Order Reference
	mm	
2	32	6 27 13 113 00 2
3	32	6 27 13 114 00 0
4	32	6 27 13 115 00 4

Bits 1/4" Hex socket

for Torx socket screws



Size	L	Order Reference
	mm	
TX 10	26	6 27 12 026 00 6
TX 15	26	6 27 12 027 00 0
TX 20	26	6 27 12 028 00 8
TX 25	26	6 27 12 029 00 2
TX 30	26	6 27 12 031 00 3
TX 40	26	6 27 12 032 00 6

Drill chuck adapter

to accept a B16 drill chuck

Order Reference 6 19 15 003 00 4

Key-type drill chuck

Drill chuck holder B 16



Chuck opening	Weight	Outer Ø	Order Reference
mm	kg	mm	
1-10	0,44	43	6 32 02 004 01 2
1,5-13	0,41	43	6 32 02 030 01 5



Chuck opening	Weight	Outer Ø	Order Reference
mm	kg	mm	
1-16	0,64	56	6 32 02 037 01 0

Quick-action chuck

Drill chuck holder B 16
form R tip



Chuck opening	Weight	Outer Ø	Order Reference
mm	kg	mm	
0-10	0,61	42,5	6 32 04 016 00 7
1-13	0,88	46	6 32 04 017 00 1

R shaped tip with chucking force safety device



Chuck opening	Weight	Outer Ø	Order Reference
mm	kg	mm	
1,5-13	0,27	42,5	6 32 04 036 00 5
1-13	0,56	42,5	6 32 04 032 00 6
1,5-13	0,15	43	6 32 04 035 00 2

Joint

with 1/2" square socket, output 1/2" outer square



L	Order Reference
mm	
67	6 22 16 001 00 5